


Capacitive Proximity Sensors (DC)

# CBCT1214

**M12 (PNP NO)**

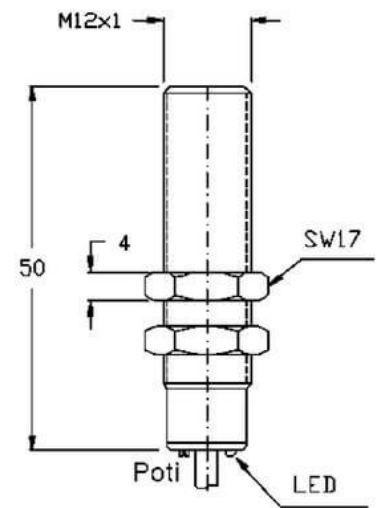

|                          |                                  |
|--------------------------|----------------------------------|
| Connection:              | 2 m PUR/3 x 0,14 mm <sup>2</sup> |
| Connection type:         | cable                            |
| Outlet:                  | PNP NO                           |
| Design:                  | M12                              |
| Diameter:                | M12x1                            |
| Installation type:       | flush                            |
| Short protection:        | yes                              |
| Length:                  | 50 mm                            |
| LED:                     | yes                              |
| No-load current:         | 15 mA                            |
| Nominal voltage:         | 24 VDC                           |
| Switching distance:      | 1 - 4 mm                         |
| Switching frequency:     | 100 Hz                           |
| Protection class:        | IP 65                            |
| Voltage drop:            | 0,8 V                            |
| Voltage type:            | VDC                              |
| Voltage range:           | 10 - 35 V                        |
| Ampacity:                | 200 mA                           |
| Environment temperature: | -30 bis 70 °C                    |
| Material:                | steel                            |

Further information about this product can be found on our website, please visit:

[https://schoenbuch-sensor.de/en/products/cbct1214\\_en/](https://schoenbuch-sensor.de/en/products/cbct1214_en/)