


Capacitive Proximity Sensors (DC)

CBCT3015

M30 (PNP NC)

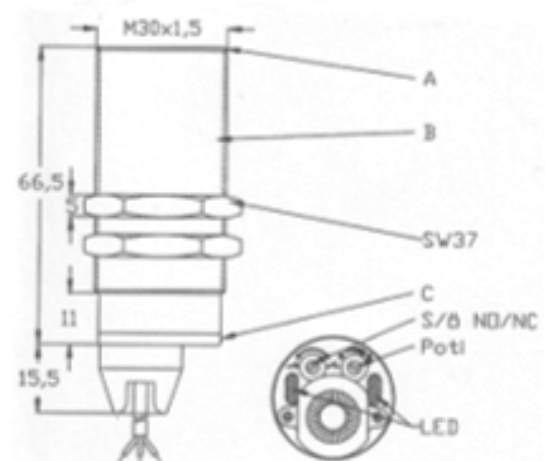

Connection:	2 m PVC/3 x 0,34 mm ²
Connection type:	cable
Outlet:	PNP NC
Design:	M30
Diameter:	M30x1,5
Installation type:	flush
Short protection:	yes / yes
Length:	82 mm
LED:	yes
LED switching state:	yes
No-load current:	18 mA
Nominal voltage:	24 VDC
Reproducibility:	2 %
Switching distance:	1 - 20 mm adjustable
Switching outlet:	PNP NC/NO switchable
Switching frequency:	100 Hz
Switching hysteresis:	15 %
Protection class:	IP 67
Voltage drop:	1.8 V
Voltage type:	VDC
Voltage range:	10 - 35 V
Ampacity:	300 mA
Temperature drift:	20 %
Environment temperature:	-30 bis +70 °C
Fouling level:	1
Material:	Edelstahl

Further information about this product can be found on our website, please visit:

https://schoenbuch-sensor.de/en/products/cbct3014_en/cbct3015_en/