


Through Beam Lightbarriers (Miniature Sizes Without External Amplifier)

# EDHW 2215

## 22 (PNP-NC)

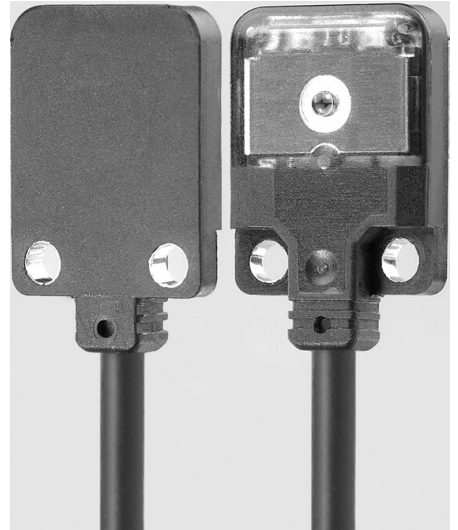

Connection:	2 m PVC cable
Connection type:	cable
Switching frequency:	≤ 1 ms
Outlet:	PNP-NC
Design:	22
Function:	trough beam lightbarrier
Case material:	plastic
Short protection:	yes, yes
LED outlet + stability:	yes, yes
No-load current:	≤ 12 mA
Light source:	LED red
Shock / vibration:	- , 30 G
Protection class:	IP 67
Voltage drop:	≤ 1 VDC
Voltage range:	12...24 VDC
Ampacity:	< 50 mA
Tap range:	0...500 mm
Environment temperature:	-25 °C ...+55°C

Further information about this product can be found on our website, please visit:  
[https://schoenbuch-sensor.de/en/products/edhw-2212\\_en/edhw-2215\\_en/](https://schoenbuch-sensor.de/en/products/edhw-2212_en/edhw-2215_en/)