


Through Beam Lightbarriers (Cylindric Sizes)

# EUCT 1206

## M12 (NPN-NO+NC - programmable)

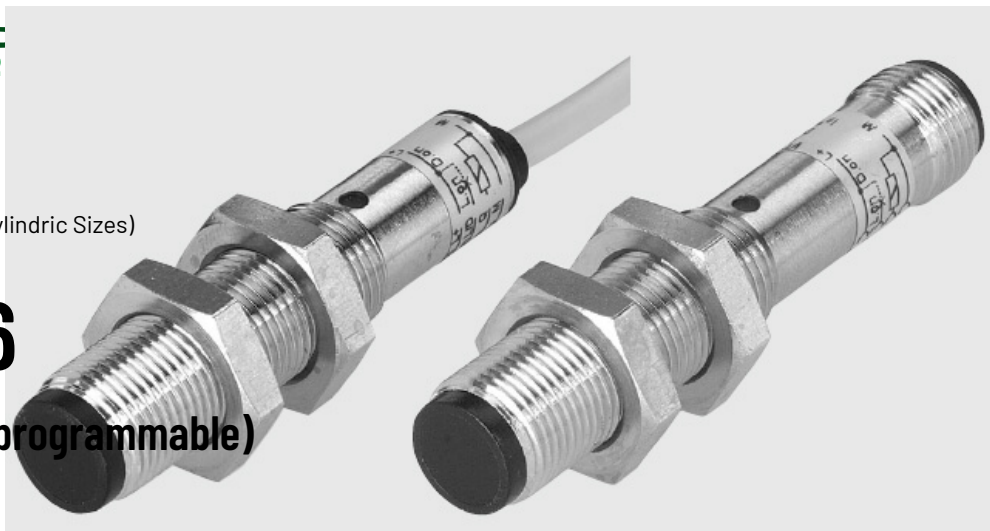

Connection:	2 m PVC cable
Connection type:	cable
Switching frequency:	< 2 ms
Outlet:	NPN-NO+NC - programmable
Design:	M12
Specialty:	Teach in
Function:	trough beam lightbarrier
Case material:	nickel plated brass-PA
Weight:	55 g
Short protection:	yes, yes
LED outlet + stability:	yellow, yellow
No-load current:	< 20 mA
Light source:	infrared
Lens material:	PC
Protection class:	IP 67
Voltage drop:	≤ 2 VDC
Voltage range:	10...30 VDC
Ampacity:	< 100 mA
Tap range:	0...5 m
Environment temperature:	-25 °C ...+70°C
VDE protection class:	ja

Further information about this product can be found on our website, please visit:

[https://schoenbuch-sensor.de/en/products/euct-1206\\_en/](https://schoenbuch-sensor.de/en/products/euct-1206_en/)