


Inductive Proximity Sensors (DC Rectangular Sizes)

IB4MD2414

R24 (PNP NO)

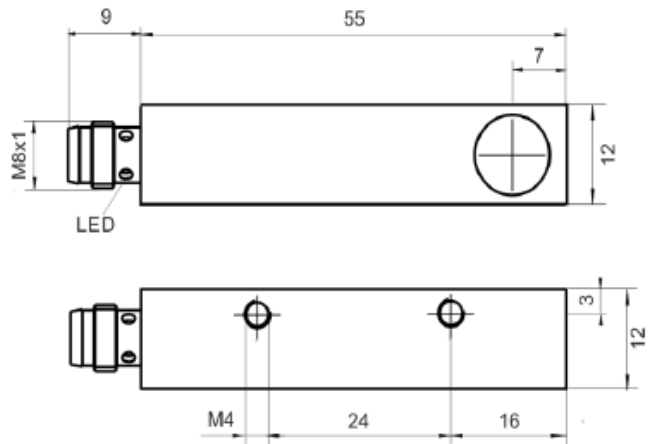

Connection:	plug M8, 3-pin
Connection type:	plug M8
Outlet:	PNP NO
Design:	R24 (12x12x64)
Width:	12 mm
Installation type:	flush
Switch-on delay:	100 ms
Height:	12 mm
Short protection:	yes / yes
Length:	64 mm
LED:	yes
No-load current:	13 mA
Material (active surface):	Pocan KU 2-7503/1 + Batch RAL 9004
Nominal voltage:	24 VDC
Reproducibility:	5 %
Switching distance:	4 mm
Switching frequency:	800 Hz
Switching hysteresis:	15 %
Protection class:	IP 67 nach EN 60528
Voltage drop:	2,4 V
Voltage type:	V DC
Voltage range:	10 - 30 V
Ampacity:	200 mA
Temperature drift:	10 %
Environment temperature:	-25 bis +70 °C
Material:	nickel plated brass

Further information about this product can be found on our website, please visit:

<https://schoenbuch-sensor.de/en/products/ib4md2414-2/>