


Inductive Proximity Sensors (DC Cylindric Sizes)

ILLD1215

M12 (PNP NC)

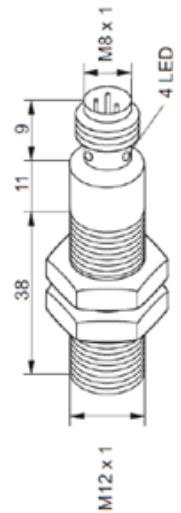

Connection:	plug M8, 3pole
Connection type:	plugable M8
Outlet:	PNP NC
Design:	M12 x 1 x 58 mm
Diameter:	M12x1
Installation type:	flush
Case material:	cap PA 6.6
Short protection:	yes, yes
Length:	58 mm
LED:	yes
No-load current:	≤ 10 mA
Nominal voltage:	24 V DC
Reproducibility:	≤ 10 %
Switching distance:	2 mm
Switching frequency:	1.000 Hz
Switching hysteresis:	≤ 15 %
Protection class:	IP 67
Voltage drop:	≤ 2,4 V
Voltage type:	V DC
Voltage range:	10 - 30 V
Ampacity:	200 mA
Temperature drift:	≤ 10 %
Environment temperature:	-25 bis +70 °C
Material:	nickel plated brass

Further information about this product can be found on our website, please visit:

<https://schoenbuch-sensor.de/en/products/illd1215-2/>