


Through Beam Lightbarriers (Plastic Fibre)

# LLHA 2000

**fibre optic LRIA 2000 (PNP-NO)**

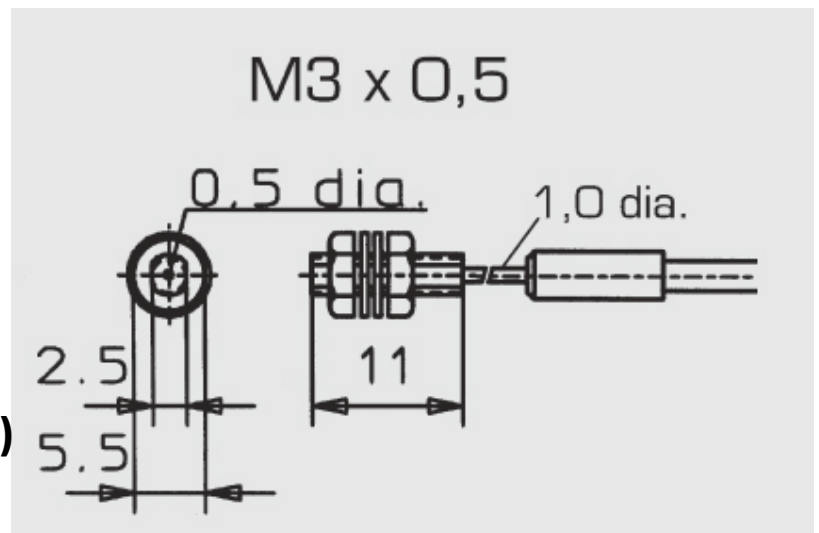

|                          |                        |
|--------------------------|------------------------|
| Outlet:                  | PNP-NO                 |
| Fiber diameter:          | 0,5 mm                 |
| Function:                | plastic fibre          |
| Min. bending radius:     | 25 mm                  |
| Light emission:          | axial                  |
| Light conductor length:  | 2000 mm manufacturable |
| Material hull:           | nickel plated brass    |
| Min. object size:        | ■ 0,03 mm              |
| Switching distance:      | 50 mm                  |
| Protection class:        | IP 67                  |
| Environment temperature: | -40 °C...+70 °C        |
| Coating:                 | Polyethylen black      |

Further information about this product can be found on our website, please visit:

[https://schoenbuch-sensor.de/en/products/llha-2000\\_en/](https://schoenbuch-sensor.de/en/products/llha-2000_en/)