


Reflective Types (Rectangular Sizes)

TLRD 5207

52 (PNP-NO+NC - programmable)

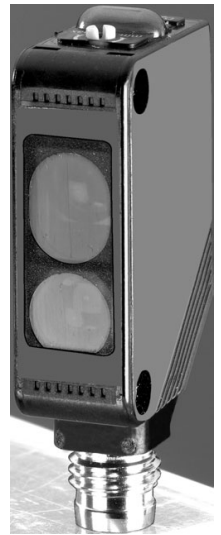

Connection:	plug M8, 4-pin
Connection type:	plug M8
Switching frequency:	≤ 1 ms
Outlet:	PNP-NO+NC - programmable
Design:	52
Specialty:	resolution 0,4 mm
Adjustment range:	single turn potentiometer (20 %...100 %)
Function:	reflective type
Case material:	PBT
Weight:	30 g
Short protection:	yes, yes
LED outlet + stability:	orange, green
No-load current:	≤ 30 mA
Light source:	infrared
Lens material:	Methacrylic resin
Switching distance frequency:	Kodakcard white 10 x 10 mm
Switching hysteresis:	≤ 20 % [Sn]
Protection class:	IP 67
Voltage drop:	≤ 2 VDC
Voltage range:	12...24 VDC
Ampacity:	≤ 100 mA
Tap range:	0... 1000 mm
Environment temperature:	-25 °C ...+55°C

Further information about this product can be found on our website, please visit:

https://schoenbuch-sensor.de/en/products/tlrd-5206_en/tlrd-5207_en/