


Reflective Types (Rectangular Sizes)

TLRD 5520 *discontinued*

55 (PNP-NO+NC - programmable)

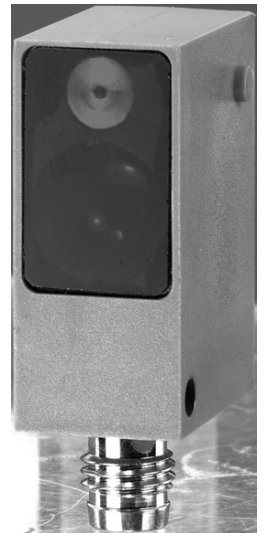

Connection:	plug M8, 4-pin
Connection type:	plug M8
Switching frequency:	≤ 1 ms
Outlet:	PNP-NO+NC - programmable
Design:	55
Specialty:	resolution 0,4 mm
Adjustment range:	270° Potentiometer
EMC:	IEC-801
Function:	reflective type
Case material:	plastic
Short protection:	yes, yes
Laser class:	2 nach EN 60825
LED outlet + stability:	yellow, green
No-load current:	≤ 50 mA
Light source:	Laser 670 nm
Lens material:	glass
Switching distance frequency:	Kodakcard white 10 x 10 mm
Switching hysteresis:	≤ 2,5 mm
Protection class:	IP 67
Voltage drop:	≤ 2 VDC
Voltage range:	10... 32 VDC
Ampacity:	≤ 100 mA
Tap range:	40... 120 mm
Environment temperature:	-20 °C ...+55°C

Further information about this product can be found on our website, please visit:

https://schoenbuch-sensor.de/en/products/tlrd-5520_en/