


Reflexaster (Zylindrische Bauformen)

TELI 1807N

M18 (PNP-NO+NC - programmierbar)

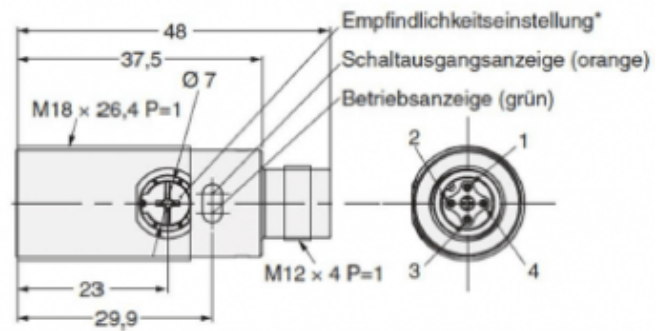

Connection:	Stecker M12
Connection type:	Stecker M12
Switching frequency:	0,5 ms
Outlet:	PNP-NO+NC - programmierbar (hell-/dunkelschaltend)
Design:	M18
Specialty:	Hintergrundausbildung
Adjustment range:	0... 300 mm [Sn]
Function:	Reflexaster
Case material:	MS vernickelt
Short protection:	ja, ja
Length:	48 mm
LED outlet + stability:	ja, -
No-load current:	≤ 25 mA
Light emission:	axial
Light source:	rote LED (624 nm)
Switching distance frequency:	Papier weiß 100 x 100 mm
Switching hysteresis:	≤ 20 % [Sn]
Protection class:	IP 67
Voltage drop:	≤ 3 VDC
Voltage range:	10...30 VDC
Ampacity:	≤ 100 mA
Tap range:	0...300 mm
Environment temperature:	-25 °C ...+55°C

Further information about this product can be found on our website, please visit:

<https://schoenbuch-sensor.de/en/produkte/teli-1807n/>